

MTK8227L





Android 9.0



GB5864A



MTK8227L
(4 cores)



Cortex A7



Frequency: 1.5 GHz



1/2GB DDR3



RadioTuner
ST7708/7786/NXP6686



Power IC:
TDA7388/7851/7850




16/32GB

Android 9.0



Quad Core

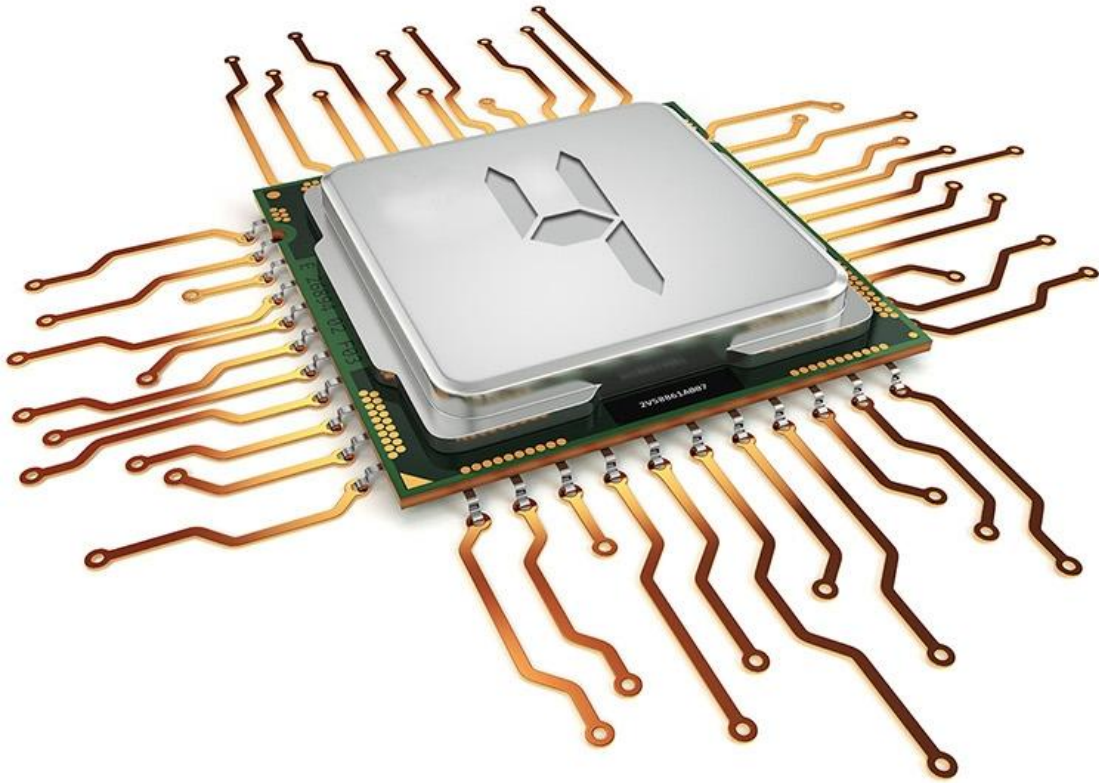

DSP:32 Band EQ



Specification	
OS	Android 9.0
CPU	Quad core ARM A7 4*1.2 GHz
ROM	1GB or 2GB
memory	16GB or 32GB
LCD	800*480 or 1024*600
GPS chipset	MT6625
Touchscreen	Capacitive
TFT IC	AC8227L
Power IC	TDA7388/7850/7851
DVD IC	SC3590 USB DVD

Radio tuner	ST7708/7786/6686
Power output	4*50W (MOSFET OUTPUT)
Bluetooth	MT6625 bluetooth4.0
Video coder	HD 1920*1080
WIFI	Built-in
Video input	front camera/rear camera/aux
Audio input	AUX-L; AUX-R (2 channels)
Video output	Video1, Video2 (2 channels)
Audio output	FL; FR; RL; RR and Subwoofer (5 channels)
USB connector	USB1; USB2
USB support Max	2TB hardware
SD connector	multi-media card and GPS card
Music	MP3、WMA、AAC、RM、FALC etc
Video	MPEG-1/2/4、H264、H263、VC1、RV、RMVB、DivX、Sorenson Spark、Spark、VP8、AVS Stream...
Picture	JPG/BMP/JEPG/GIF/PNG
Frequency range	FM: 76.0MHz-108.0MHz/AM: 522KHz-1620KHz
Radio area	Asia, Europe, Russia, America 1,America 2 and Japan
DVD	Optional
Video output range	1.0V-1.2V(75Ω)
Compatible	DVD/DIVX/MP4/MP3/MP2/VCD
Testing Voltage	13.8V
Max output	4*35W
Standard/agreement	IEEE802.11B/g/n compatible WLAN
USB	USB2.0
RF Power	15dBm

Optional function	TPMS, DVR(support by USB connector, 1080P, TV(ISDB-T))
DSP	30EQ
CarPlay	Built-in
Android Auto	no support